
Moving the Central Savannah River Area Forward:



Road and Bridge Conditions, Traffic Safety, Travel Trends and Funding Needs in the Central Savannah River Area

NOVEMBER 2020

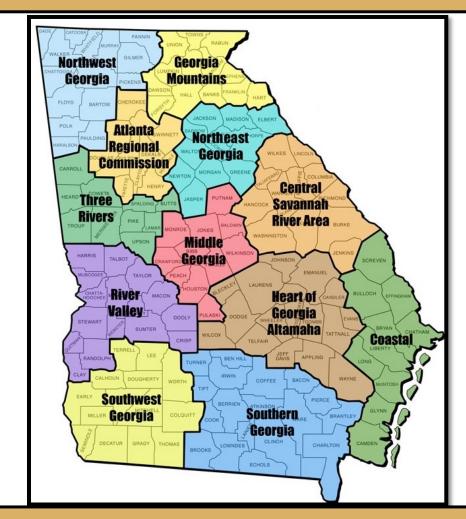

A National Transportation Research Nonprofit

Founded in 1971, <u>TRIP</u>[®] of Washington, DC, is a nonprofit organization that researches, evaluates and distributes economic and technical data on surface transportation issues. TRIP is sponsored by insurance companies, equipment manufacturers, distributors and suppliers; businesses involved in highway and transit engineering and construction; labor unions; and organizations concerned with efficient and safe surface transportation.

Introduction

Accessibility and connectivity are critical factors in a region's quality of life and economic competitiveness. The growth and development of a region hinges on the ability of people and businesses to efficiently and safety access employment, customers, commerce, recreation, education and healthcare via multiple transportation modes. The quality of life of residents in the Central Savannah River Area and the pace of the region's economic growth are directly tied to the condition, efficiency, safety and resiliency of its transportation system. The necessity of a reliable transportation system in Georgia has been reinforced during the coronavirus pandemic, which has placed increased importance on the ability of a region's transportation network to support a reliable supply chain.

Providing a safe, efficient and well-maintained 21st century transportation system, which will require long-term, sustainable funding, is critical to supporting economic growth, improved safety and quality of life throughout the area. A lack of reliable and adequate transportation funding could jeopardize the condition, efficiency and connectivity of the region's transportation network and hamper economic growth.

TRIP's "Moving the Central Savannah River Area Forward" report examines travel and population trends, road and bridge conditions, traffic safety, congestion, and transportation funding needs in the Central Savannah River Area, which is located in the east central portion of the state and includes the following 13 counties: Burke, Columbia, Glascock, Hancock, Jefferson, Jenkins, Lincoln, McDuffie, Richmond, Taliaferro, Warren, Washington, and Wilkes.

Sources of information for this report include a survey of county governments by TRIP, the Federal Highway Administration (FHWA), the Georgia Department of Transportation (GDOT), the American Road and Transportation Builders Association (ARTBA), the Bureau of Transportation Statistics (BTS), the U. S. Census Bureau, the Center for Transportation Studies, the Texas Transportation Institute (TTI) and the National Highway Traffic Safety Administration (NHTSA). All data used in the report are the most recent available.

Population, Travel and Economic Trends in the Central Savannah River Area

To foster quality of life and spur continued economic growth in the Central Savannah River Area and throughout Georgia, it will be critical that the state provide an efficient, safe and modern transportation system that can accommodate future growth in population, tourism, business, recreation and vehicle travel.

The 13 counties that comprise the Central Savannah River Area were home to approximately 480,000 residents in 2018, an increase of six percent since 2010.¹ Vehicle travel in the Central Savannah River Area totaled 6.6 billion miles in 2018, an increase of 30 percent since 2015.²

Statewide, Georgia's population grew to approximately 10.5 million residents in 2018, an eight percent increase since 2010.³ From 2014 to 2018, annual VMT in Georgia increased by 18 percent, to approximately 131 billion miles traveled annually.⁴ Due to the Covid-19 pandemic, vehicle travel in Georgia dropped by as much as 38 percent in April 2020 (as compared to vehicle travel during the same month the previous year), but rebounded to 12 percent below the previous year's volume in August 2020.⁵

Pavement Conditions in the Central Savannah River Area

The life cycle of Georgia's roads is greatly affected by state and local governments' ability to perform timely maintenance and upgrades to ensure that road and highway surfaces last as long as possible.

Based on results of a TRIP survey of Georgia counties conducted in late 2019 and early 2020, TRIP has calculated the share of county-maintained roads in the Central Savannah River Area in poor, fair and good condition. Survey responses from the Central Savannah River Area indicate that 25 percent of county-maintained roads are in poor condition, 40 percent are in fair condition, and 36 percent are in good condition.⁶

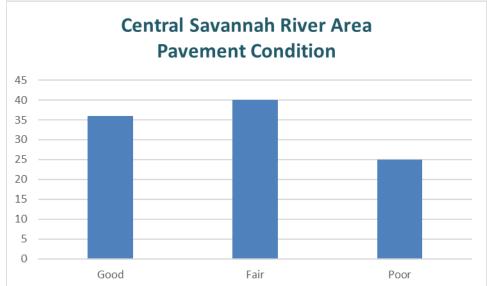


Chart 1. Share of county-maintained roads in the Central Savannah River Area in poor, fair or good condition.


Source: TRIP survey of Georgia counties, conducted December 2019 - February 2020.



Roads rated in poor condition may show signs of deterioration, including rutting, cracks and potholes. In some cases, poor roads can be resurfaced but often are too deteriorated and must be reconstructed. Roads rated in fair condition may show signs of significant wear and may also have some visible pavement distress. Most pavements in fair condition can be repaired by resurfacing, but some may need more extensive reconstruction to return them to good condition.

TRIP's survey of county governments in the Central Savannah River Area found that, of the miles of county-maintained roadway in need of resurfacing, current budgets will only allow for resurfacing of eight percent of those miles in 2020.⁷ And, of the miles of county-maintained roadway in the Central Savannah River Area in need of reconstruction, only two percent will be able to be reconstructed in 2020 under current funding conditions.⁸

Chart 2. Share of roads in need of resurfacing or reconstruction in the Central Savannah River Area vs. share of Central Savannah River Area roads that are expected to be resurfaced or reconstructed in 2020.

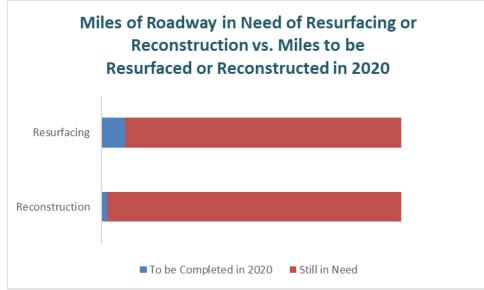



Pavement failure is caused by a combination of traffic, moisture and climate. Moisture often works its way into road surfaces and the materials that form the road's foundation. Road surfaces at intersections are more prone to deterioration because the slow-moving or standing loads occurring at these sites subject the pavement to higher levels of stress. It is critical that roads are fixed before they require major repairs because reconstructing roads costs approximately four times more than resurfacing them.⁹ As roads and highways continue to age, they will reach a point of deterioration where routine paving and maintenance will not be adequate to keep pavement surfaces in good condition and costly reconstruction of the roadway and its underlying surfaces will become necessary.



4

TRIP's survey of Central Savannah River Area counties indicates that the amount of money anticipated to be spent in 2020 on roads, highways and bridges is only 41 percent of the total amount that needs to be spent annually to make significant progress towards achieving a state of good repair for roads, highways and bridges.


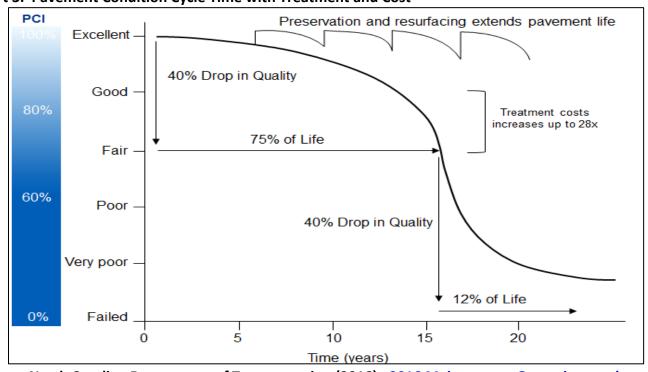


Chart 3. Pavement Condition Cycle Time with Treatment and Cost

Source: North Carolina Department of Transportation (2016). <u>2016 Maintenance Operations and</u> <u>Performance Analysis Report</u>

Long-term repair costs increase significantly when road and bridge maintenance is deferred, as road and bridge deterioration accelerates later in the service life of a transportation facility and requires more costly repairs. A <u>report on maintaining pavements</u> found that every \$1 of deferred maintenance on roads and bridges costs an additional \$4 to \$5 in needed future repairs.¹⁰






Bridge Conditions in the Central Savannah River Area

Bridges form key links in the region's highway system, providing communities and individuals access to employment, schools, shopping and medical facilities, and facilitating commerce and access for emergency vehicles.

In the Central Savannah River Area, a total of 12 percent (99 of 850) of locally and state-maintained bridges are rated as deficient.¹¹ This includes all bridges that are 20 feet or more in length. Each day, 115,000 vehicles travel over deficient bridges in the Central Savannah River Area.¹²

A bridge is deemed deficient if it meets at least one of the following criteria: The physical condition of a bridge deck, superstructure or substructure is rated a 4 or below on a scale of nine, indicating significant deterioration of a major component of the bridge; A bridge is restricted to carrying only lighter-weight vehicles; A bridge has a carrying capacity of 18 tons or less, which restricts it from carrying larger commercial vehicles.

In the Central Savannah River Area, 16 bridges received a score of 4 or below for the condition of the bridge deck,

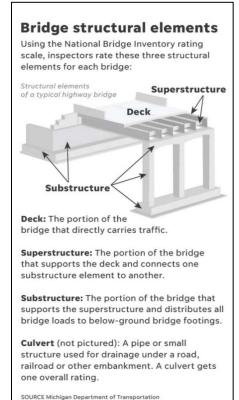

superstructure or substructure; 58 bridges have a carrying capacity of 18 tons or less; and 84 bridges are restricted to carrying only lower-weight vehicles.¹³

Statewide, ten percent (1,551 of 14,799) of Georgia's locally and state-maintained bridges are rated in deficient condition.¹⁴

Bridges that are deficient may be posted for lower weight limits or closed if their condition warrants such action. Deteriorated bridges can have a significant impact on daily life. Restrictions on vehicle weight may cause many vehicles – especially emergency vehicles, commercial trucks, school buses and farm equipment – to use alternate routes to avoid posted bridges. Redirected trips also lengthen travel time, waste fuel and reduce the efficiency of the local economy. Bridges that have a carrying capacity below 18 tons largely are unable to carry large commercial vehicles, which can harm a region's economic competitiveness by restricting access for commercial goods.



Transportation

The service life of bridges can be extended by performing routine maintenance such as resurfacing decks, painting surfaces, ensuring that a facility has good drainage and replacing deteriorating components. But most bridges will eventually require more costly reconstruction or major rehabilitation to remain operable.

The chart below ranks the 30 most deficient bridges (carrying a minimum of 500 vehicles per day) in the Central Savannah River Area based on the number of categories where the bridge ranked "deficient" (P = physical condition of deck, superstructure or substructure based on a rating of 4 or below for its deck, substructure or superstructure; C = the carrying capacity of the bridge is 18 tons or less; R = the bridge is restricted to only carrying lighter -weight vehicles), and average daily traffic (ADT).

Deficiency Noted	Rank	County	Facility Carried	Feature Intersected	Location	Year Built	ADT
PCR	1	Richmond	5TH STREET	SAVANNAH RIVER	AT THE SC S L	1931	3,615
PCR	2	Wilkes	STONEY ROAD	LITTLE KETTLE CREEK	6 MI SW OF WASHINGTON	1967	735
CR	3	Richmond	BERCKMAN ROAD	RAES CREEK	12.9 MI NE OF HEPHIZIBAH	1950	15,705
CR	4	Wilkes	SR 17	BROAD RIVER	7.5 MI N OF TIGNALL	1971	2,265
CR	5	Burke	SR 23	BRIER CREEK OVERFLOW	2.5 MI N OF SARDIS	1962	1,770
CR	6	Burke	THOMPSON BR ROAD	BRIER CREEK OVERFLOW	8.1 MI E OF WAYNESBORO	1959	1,140
CR	7	Burke	THOMPSON BR ROAD	BRIER CREEK	8 MI E OF WAYNESBORO	1959	1,080
CR	8	Burke	STORY MILL ROAD	BRIER CREEK	6.5 MI NW OF WAYNESBORO	1968	930
CR	9	Burke	HADEN POND ROAD	WALNUT BRANCH	2.4 MI N OF WAYNESBORO	1966	900
CR	10	Hancock	POWELTON CH RD	BEAVERDAM CREEK	10.6 MI NE OF SPARTA	1960	900
CR	11	Lincoln	LEWIS COOK ROAD	FLORENCE CREEK	2.5 MI W OF LINCOLNTON	1950	900
CR	12	Columbia	DOZIER ROAD	GREENBRIER CREEK	2 MI NW OF APPLING	1962	735
CR	13	Hancock	SHOAL ROAD	LITTLE OGEECHEE RIVER	6.9 MI E OF SPARTA	1955	735
CR	14	Taliaferro	UPPER MILL ROAD	LITTLE RIVER	4.7 MI NW OF SHARON	1971	735
CR	15	Wilkes	BIG CEDAR ROAD	ROCKY CREEK	8.3 MI SE OF WASHINGTON	1966	735
PC	16	Glascock	SNIDER ROAD	JOES CREEK	2.4 MI E OF MITCHELL	1950	735
CR	17	Hancock	LINTON ROAD	BUFFALO CREEK	11.6 MI S OF SPARTA	1958	600
CR	18	Hancock	SHOAL ROAD	OGEECHEE RIVER	12.7 MI E OF SPARTA	1958	570
CR	19	Jenkins	W.OLD SAVANNAH RD.	DEEP CREEK	10.7 MI W OF MILLEN	1958	555
CR	20	Warren	SR 80	HART CREEK	4.5 MI N OF CAMAK	1957	525
R	21	Richmond	SR 10 - US 1	CR 2495 GREENE STREET	13.2 MI NE OF HEPHZIBAH	1957	29,955
R	22	Richmond	NORTH LEG	CSX RAILROAD	10.2 MI N OF HEPHIZIBAH	1953	12,825
С	23	Jefferson	US 1/ SR 4	WILLIAMSON SWAMP CRK	CITY OF WADLEY	1966	6,705
С	24	Wilkes	SR 17	BROAD RIVER OVERFLOW	7.3 MI N OF TIGNALL	1971	2,580
Р	25	Richmond	GOODRICH ROAD	CANAL SPILLWAY	13.7 MI NE OF HEPHZIBAH	1940	2,355
R	26	Jenkins	OLD PERKINS ROAD	LITTLE BUCKHEAD CREEK	1.5 MI N OF MILLEN	1965	1,410
R	27	Burke	STORY MILL ROAD	McBEAN CREEK	10.5 MI NW OF WAYNESBORO	1968	1,215
R	28	Columbia	TUBMAN ROAD	KIOKEE CREEK	3 MI NE OF APPLING	1971	1,185
R	29	Jefferson	MIDDLE GROUND RD	BIG CREEK	4.5 MI NE OF LOUISVILLE	1967	1,155
R	30	Hancock	LINTON ROAD	BUFFALO CREEK	4 MI S OF SPARTA	1948	1,020

Chart 4. Most deficient bridges	es in the Central Savannah River <i>I</i>	Area.
---------------------------------	---	-------

Source: List of deficient bridges provided by Georgia Department of Transportation. Rankings calculated by TRIP.



Traffic Safety in the Central Savannah River Area

A total of 415 people were killed in traffic crashes in the Central Savannah River Area from 2014 to 2018, an average of 83 fatalities per year.¹⁵ The Central Savannah River Area had a traffic fatality rate of 1.19 fatalities per 100 million vehicle miles of travel in 2018, slightly higher than the statewide fatality rate of 1.14 fatalities per 100 million vehicle miles of travel in 2018.¹⁶

Year	Fatalities
2014	70
2015	86
2016	84
2017	92
2018	83
Average	83
Total	415

Chart 5. Traffic Fatalities in the Central Savannah River Area, 2014 – 2018.

Source: TRIP analysis of National Highway Traffic Safety Administration data.

Three major factors are associated with fatal vehicle crashes: driver behavior, vehicle characteristics and roadway features. It is estimated that roadway features are likely a contributing factor in approximately one-third of fatal traffic crashes. Roadway features that impact safety include the number of lanes, lane widths, lighting, lane markings, rumble strips, shoulders, guard rails, other shielding devices, median barriers and intersection design.

Improving safety on Georgia's roadways can be achieved through further improvements in vehicle safety; improvements in driver, pedestrian, and bicyclist behavior; and, a variety of improvements in roadway safety features. The severity of serious traffic crashes could be reduced through roadway improvements, where appropriate, such as converting intersections to roundabouts; removing or shielding roadside objects; the addition of left-turn lanes at intersections; the signalization of intersections; adding or improving median barriers; improved lighting; adding centerline or shoulder rumble strips; providing appropriate pedestrian and bicycle facilities, including sidewalks and bicycle lanes; providing wider lanes, wider and paved shoulders; upgrading roads from two lanes to four lanes; providing better road and lane markings; and updating rail crossings.

The U.S. has a \$146 billion backlog in needed roadway safety improvements, according to a 2017 <u>report</u> from the AAA Foundation for Traffic Safety. The report found implementing these cost-effective and



needed roadway safety improvements on U.S. roadways would save approximately 63,700 lives and reduce the number of serious injuries as a result of traffic crashes by approximately 350,000 over 20 years.

Importance of Transportation System to Development in the Central Savannah River Area

Reliable highway access is critical to the economic development of the Central Savannah River Area. At a time when a significant increase in freight deliveries are forecast for Georgia, the quality of a region's transportation system will have a significant impact on its ability to attract economic development

The amount of freight transported in Georgia and the rest of the U.S. is expected to increase significantly as a result of further economic growth, changing business and retail models, increasing international trade, and rapidly changing consumer expectations that place an emphasis on faster deliveries, often of smaller packages or payloads.

Every year, \$843 billion in goods are shipped to and from sites in Georgia, mostly by trucks.¹⁷ Seventy-six percent of freight delivered to or from sites in Georgia are shipped by truck and another 14 percent are shipped by multiple modes, including trucking.¹⁸ The value of freight shipped to and from sites in Georgia, in inflation-adjusted dollars, is expected to increase 115 percent by 2045 and by 89 percent for goods shipped by trucks.¹⁹ But the ability of the Central Savannah River region's freight transportation system to efficiently and safely accommodate the growing demand for freight movement could be hampered by deficient roads and bridges, including bridges that are not able to carry large commercial vehicles.

The need to improve the region's freight network is occurring at a time when the nation's freight delivery system is being transformed by advances in vehicle autonomy, manufacturing, warehousing and supply chain automation, increasing e-commerce, and the growing logistic networks being developed by Amazon and other retail organizations in response to the demand for a faster and more responsive delivery and logistics cycle.

Investments in transportation improvements in Georgia play a critical role in the state's economy. A <u>report</u> by the American Road & Transportation Builders Association found that the design, construction and maintenance of transportation infrastructure supports the equivalent of approximately 110,000 full-time jobs across all sectors of the state economy, earning these workers approximately \$3.9 billion annually.²⁰ These jobs include approximately 55,000 full-time jobs directly involved in transportation infrastructure construction and related activities. Spending by employees and companies in the transportation design and construction industry supports an additional 55,000 full-time jobs in Georgia.²¹ Transportation construction



in Georgia contributes an estimated \$703 million annually in state and local income, corporate and unemployment insurance taxes and the federal payroll tax.²²

Approximately 1.9 million full-time jobs in Georgia in key industries like tourism, retail sales, agriculture and manufacturing are dependent on the quality, safety and reliability of the state's transportation infrastructure network.

Local, regional and state economic performance is improved when a region's surface transportation system is expanded or repaired. This improvement comes as a result of the initial job creation and increased employment created over the long-term because of improved access, reduced transport costs and improved safety.

Increasingly, companies are looking at the quality of a region's transportation system when deciding where to re-locate or expand. Regions with congested or poorly maintained roads may see businesses relocate to areas with a smoother, more efficient and more modern transportation system. Highway accessibility was ranked the number one site selection factor in a 2020 <u>survey</u> of corporate executives by Area Development Magazine.²³

Conclusion

As the Central Savannah River Area looks to support further economic and population growth, it will be critical that the region is able to provide a well-maintained, safe and efficient 21st century network of roads, highways, bridges and transit that can accommodate the mobility demands of a modern society.

A robust and reliable transportation system that is maintained in good condition, can accommodate large commercial vehicles, and is reliable and safe is vital to the quality of life of Central Savannah River Area residents, the success and growth of businesses and the positive experience of its visitors.

###



ENDNOTES

² Georgia Department of Transportation.

³ U.S. Census Bureau (2018).

⁴ U.S. Department of Transportation - Federal Highway Administration: Highway

Statistics 2000 and 2018.

⁵ Federal Highway Administration – Traffic Volume Trends.

⁶ TRIP survey of Georgia counties, December 2019-February 2020.

⁷ <u>Ibid</u>.

⁸ <u>Ibid.</u>

⁹ Selecting a Preventative Maintenance Treatment for Flexible Pavements. R. Hicks, J. Moulthrop. Transportation Research Board. 1999. Figure 1.

¹⁰ <u>Pavement Maintenance</u>, by David P. Orr, PE Senior Engineer, Cornell Local Roads Program, March 2006.

¹¹ Georgia Department of Transportation.

¹² <u>Ibid</u>.

¹³ <u>Ibid</u>.

¹⁴ <u>Ibid.</u>

¹⁵ Federal Highway Administration National Highway Traffic Safety Administration, 2014-2018.

¹⁶ Federal Highway Administration National Highway Traffic Safety Administration, 2014-2018. County VMT data comes from the Georgia Department of Transportation.

¹⁷ TRIP analysis of Federal Highway Administration's Freight Analysis Framework data (2018). Data is for 2016. <u>https://faf.ornl.gov/fafweb/</u>.

¹⁸ Ibid.

¹⁹ <u>Ibid</u>.

²⁰ American Road & Transportation Builders Association (2015). The 2015 U.S. Transportation Construction Industry Profile. <u>https://www.transportationcreatesjobs.org/pdf/Economic_Profile.pdf</u>

²¹ <u>Ibid</u>.

²² <u>Ibid</u>

²³ Area Development Magazine (2020). 34th Annual Survey of Corporate Executives: Availability of Skilled Labor New Top Priority. <u>https://www.areadevelopment.com/Corporate-Consultants-Survey-Results/Q1-2020/34th-annual-corporate-survey-16th-annual-consultants-survey.shtml</u>



¹ U.S. Census Bureau (2018).